

Danatronics Transducers

The ECHO series comes loaded with a default list of probes to solve a vast variety of applications for any non-destructive testing wall thickness of most engineering materials.

So, if you are measuring, boiler tubes, pressure vessels, ship hulls, bridges, coil steel, aluminum, plastic bottles, toys, trays and anything in between...we have the probe for you.

Dual Transducers

Standard Dual Transducers

ECHO Model	Part No.	Range in Steel	Echo to Echo Range** in Steel	Freq.	Diameter	Temperature Range	Connector Type
8, 9	DK-250	0.100"-20" (2.5mm-508mm)	0.200"-2" (5.08mm-50.8mm)	2.25 MHz	0.500"/12.7mm	32-392F/0-200C	Right Angle Potted - Lemo 00
8, 9	DK-525	0.040"-20" (1mm-508mm)	0.080"-2" (2mm-50.8mm)	5.0 MHz	0.250"/6.35mm	32-392F/0-200C	Right Angle Potted - Lemo 00
8, 9	DK-537	0.040"-20" (1mm-508mm)	0.080"-2" (2mm-50.8mm)	5.0 MHz	0.375"/9.52mm	32-130F/0-54C	Right Angle Potted - Lemo 00
8, 9	DKS-537	0.040"-20" (1mm-508mm)	0.100"-0.750" (2.54mm-19.05mm)	5.0 MHz	0.375"/9.52mm	32-130F/0-38C	Right Angle Potted - Lemo 00
8, 9	DK-550	0.040"-20" (0.76mm-508mm)	0.080"-2" (2mm-50.8mm)	5.0 MHz	0.500"/12.7mm	32-392F/0-200C	Right Angle Potted - Lemo 00
8, 9	DK-718	0.030"-2" (0.76mm-50.8mm)	0.060"-1" (1.52mm-25.4mm)	7.5 MHz	0.187"/4.75mm	32-130F/0-54C	Right Angle Potted - Lemo 00
8, 9	DK-718LPM*	0.050"-2" (1.25mm-50.8mm)	N/A	7.5 MHz	0.187"/4.75mm	32-392F/0-200C	Right Angle Potted - Lemo 00
8, 9	DK-1025	0.030"-2" (0.76mm-50.8mm)	N/A	10.0 MHz	0.250"/6.35mm	32-392F/0-200C	Right Angle Potted - Lemo 00

*LPM = Low Profile Mini; probe height 16mm, top dia. 12mm

**In Echo to Echo Mode recommended to use gage with live waveform (A-scan)

Composite Dual Transducers

ECHO Model	Part No.	Range in Steel	Echo to Echo Range in Steel	Freq.	Diameter	Temperature Range	Connector Type
8, 9	DC-110	0.200"-20" (5.08mm-508mm)	N/A	1.0 MHz	1"/25.4mm	10-160F/-12-70C	Right Angle Potted - Lemo 00
8, 9	DC-175	0.150"-20" (3.81mm-508mm)	N/A	1.0 MHz	0.750"/19.05mm	10-160F/-12-70C	Right Angle Potted - Lemo 00
8, 9	DC-250	0.100"-20" (2.5mm-508mm)	0.200"-2" (5.08mm-50.8mm)	2.25 MHz	0.500"/12.7mm	10-160F/-12-70C	Right Angle Potted - Lemo 00
8, 9	DC-525	0.040"-20" (1mm-508mm)	0.080"-2" (2mm-50.8mm)	5.0 MHz	0.250"/6.35mm	10-160F/-12-70C	Right Angle Potted - Lemo 00
8, 9	DC-537	0.040"-20" (1mm-508mm)	0.080"-2" (2mm-50.8mm)	5.0 MHz	0.375"/9.52mm	10-160F/-12-70C	Right Angle Potted - Lemo 00
8, 9	DC-550	0.040"-20" (1mm-508mm)	0.080"-2" (2mm-50.8mm)	5.0 MHz	0.500"/12.7mm	10-160F/-12-70C	Right Angle Potted - Lemo 00

Dual Echo To Echo Transducers

ECHO Model	Part No.	Range in Steel	Echo to Echo Range in Steel	Freq.	Diameter	Temperature Range	Connector Type
8, 9	DK-537EE	0.040"-20" (1mm-508mm)	0.080"-1.5" (2mm-38.1mm)	5.0 MHz	0.375"/9.52mm	32-130F/0-54C	Right Angle Potted - Lemo 00
8, 9	DK-718EE	0.030"-1.5" (0.76mm-38.1mm)	0.060"-1.0" (1.5mm-25.4mm)	7.5 MHz	0.187"/4.75mm	32-130F/0-54C	Right Angle Potted - Lemo 00

Dual High Temp Transducers

ECHO Model	Part No.	Range in Steel	Echo to Echo Range in Steel	Freq.	Diameter	Temperature Range	Connector Type
8, 9	DHT-537	0.040"-20" (1mm-508mm)	0.080"-2" (2mm-50.8mm)	5.0 MHz	0.375"/9.52mm	-5 to 950F -20 to 509C	Straight Microdot requires detachable cable
8, 9	DHT-537RM	0.040"-20" (1mm-508mm)	0.080"-2" (2mm-50.8mm)	5.0 MHz	0.375"/9.52mm	-5 to 950F -20 to 509C	Right Angle Microdot requires detachable cable

Quick Change Composite Element Angle Beam Transducers

Available in: Diameter: 1/4", 3/8" & 1/2"; Frequencies: 1.0, 2.25, 3.5, 5.0, 7.5 & 10.0 MHz; Standard Wedges: 30°, 45°, 60°, 70°



Danatronics Transducers

Contact Transducers

Standard Contact

ECHO Model	Part No.	Range in Steel Class 1	Range in Steel Class 2	Range in Steel Class 3	Range in Plastic	Freq.	Diameter	Temperature Range	Connector Type*
7, 8	DCK-250	0.100"-20" (2.54mm-508mm)	n/a	n/a	n/a	2.25 MHz	0.500" 12.7mm	32-392F 0-200C	Right Angle Microdot
7, 8	DCK-525	0.040"-20" (1mm-508mm)	n/a	n/a	n/a	5.0 MHz	0.250" 6.35mm	32-392F 0-200C	Right Angle Microdot
7, 8	DCK-537	0.040"-20" (1mm-508mm)	n/a	n/a	n/a	5.0 MHz	0.375" 9.52mm	32-392F 0-200C	Right Angle Microdot
7, 8	DCK-550	0.080"-20" (2mm - 508mm)	n/a	n/a	n/a	5.0 MHz	0.500" 12.7mm	32-392F 0-200C	Right Angle Microdot
7, 8	DCK-718	0.030"-10" (0.76mm - 254mm)	n/a	n/a	n/a	7.5 MHz	0.187" 4.75mm	32-392F 0-200C	Right Angle Microdot
7, 8	DCK-1025	0.030"-2" (0.76mm - 50.8mm)	n/a	n/a	n/a	10.0 MHz	0.25" 6.35mm	32-392F 0-200C	Right Angle Microdot
7, 8	DCK-1025HR	0.030"-1" (0.76mm - 25.4mm)	n/a	n/a	n/a	10.0 MHz	0.25" 6.35mm	32-392F 0-200C	Right Angle Microdot
7, 8	DCK-20125	0.025"-0.75" (0.4mm - 25.4mm)	n/a	n/a	n/a	20.0 MHz	0.125" 3.175mm	32-392F 0-200C	Right Angle Microdot

Contact Composite

ECHO Model	Part No.	Range in Steel Class 1	Range in Steel Class 2	Range in Steel Class 3	Range in Plastic	Freq.	Diameter	Temperature Range	Connector Type*
7, 8	DCC-110	0.300"-20" (7.62mm - 508mm)	n/a	n/a	n/a	1.0 MHz	1" 25.4mm	10-160F -12-70C	Right Angle Microdot
7, 8	DCC-175	0.300"-20" (7.62mm - 508mm)	n/a	n/a	n/a	1.0 MHz	0.750" 19.05mm	10-160F -12-70C	Right Angle Microdot
7, 8	DCC-250	0.100"-20" (2.54 - 508mm)	n/a	n/a	n/a	2.25.0 MHz	0.500" 12.7mm	10-160F -12-70C	Right Angle Microdot
7, 8	DCC-537	0.040"-20" (1mm-508mm)	n/a	n/a	n/a	5.0 MHz	0.375" 9.52mm	10-160F -12-70C	Right Angle Microdot


Delay Line Transducers

Delay Line Standard

ECHO Model	Part No.	Range in Steel Corrosion Mode	Range in Steel Class 2	Range in Steel Class 3	Echo to Echo Range in Steel	Range in Plastic	Freq.	Diameter	Temperature Range	Connector Type*
7, 8, 9	DLK-525	0.080"-0.750" (2mm-19mm)	0.025-0.500" (6.35mm - 12.7mm)	0.020"-0.375" (0.5mm - 9.5mm)	0.025" - 0.400" (0.635mm-10.16mm)	0.010"- 0.150" (0.254mm - 3.81mm)	5.0 MHz	0.25" 6.35mm	32-122F 0-50C	Right Angle Microdot
7, 8, 9	DLK-1025	0.080"-0.750" (2mm-19mm)	0.020"-0.500" (0.5mm - 12.7mm)	0.015"-0.375" (0.38mm - 9.5mm)	0.025" - 0.400" (0.635mm-10.16mm)	0.010"-0.150" (0.254mm - 3.81mm)	10.0 MHz	0.25" 6.35mm	32-122F 0-50C	Right Angle Microdot
7, 8, 9	DLK-1525PP-SM	0.080"-0.300" (2mm-7.62mm)	0.020"-0.200" (0.5mm - 5.08mm)	0.015"-0.125" (0.38mm - 5.08mm)	0.020" - 0.200" (0.508mm-5.08mm)	0.015"-0.060" (0.15mm - 1.52mm)	15.0 MHz	0.080" 2mm (tip dia)	32-122F 0-50C	Straight Microdot
7, 8, 9	DLK-1525PP-RM	0.080"-0.300" (2mm-7.62mm)	0.020"-0.200" (0.5mm - 5.08mm)	0.015"-0.125" (0.38mm - 5.08mm)	0.020" - 0.200" (0.508mm-5.08mm)	0.015"-0.060" (0.15mm - 1.52mm)	15.0 MHz	0.080" 2mm (tip dia)	32-122F 0-50C	Right Angle Microdot
7, 8	DLK-2025	n/a	0.015"-0.300" (3.81mm - 7.62mm)	0.006"-0.200" (0.152mm - 7.62mm)	n/a	0.003"-0.100" (0.076mm - 2.54mm)	20 MHz	0.25" 6.35mm	32-122F 0-50C	Right Angle Microdot
7, 8	DLK-20125	n/a	0.015"-0.200" (3.81mm - 7.62mm)	0.006"-0.200" (0.152mm - 7.62mm)	n/a	0.003"-0.100" (0.076mm - 2.54mm)	20 MHz	0.125" 3.175mm	32-122F 0-50C	Right Angle Microdot

Delay Line Composite

ECHO Model	Part No.	Range in Steel Class 1	Range in Steel Class 2	Range in Steel Class 3	Range in Plastic	Freq.	Diameter	Temperature Range	Connector Type*
7, 8	DLC-525	n/a	0.040"-0.500" (1mm - 12.7mm)	0.030"-0.375" (0.762mm-9.5mm)	0.020"-0.200" (0.5mm - 5.08mm)	5.0 MHz	0.375" 9.52mm	32-122F 0-50C	Right Angle Microdot

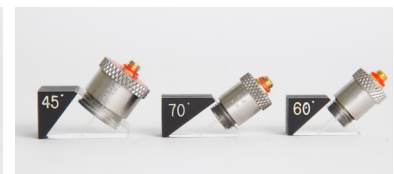

*Right Angle Microdot - requires additional cable

ECHO SERIES